




FLEXO® COPPER
PERFECT FOR GROUNDING & SHIELDING · 100% COPPER BRAID
PROVIDES EXCELLENT CURRENT TRANSMISSION

Techflex® high purity Copper Sleeve is a 100% copper braid for grounding , shielding, and many other unique projects. Our copper series of metal braids are pure metal with no fillers or coating to provide many years of continuous use. Our braid is suitable for hoses, wires, and other lines on a wide variety of applications. Techflex® Flexo® Copper braid will provide high flexibility and excellent current transmission for your demanding uses.

SIZING CHART

Nominal Size	Part #	Wall Thickness	Min Expansion	Max Expansion	*Put-Ups		Available Colors	Kgs/100m
					M	L		
3,2mm	MBC0.13CP	0,38mm	3,2mm	6,4mm	7,6m	76,2m	1	1,34
6,4mm	MBC0.25CP	0,64mm	6,4mm	9,5mm	7,6m	30,5m	1	4,46
9,5mm	MBC0.38CP	0,46mm	9,5mm	19,1mm	7,6m	30,5m	1	4,61
12,7mm	MBC0.50CP	0,51mm	12,7mm	25,4mm	7,6m	30,5m	1	6,10
19,1mm	MBC0.75CP	0,64mm	19,1mm	31,8mm	7,6m	30,5m	1	11,76
25,4mm	MBC1.00CP	1,02mm	25,4mm	44,5mm	7,6m	30,5m	1	20,83
38,1mm	MBC1.50CP	1,40mm	38,1mm	54,0mm	7,6m	30,5m	1	29,76
57,2mm	MBC2.25CP	1,52mm	57,2mm	81,0mm	7,6m	30,5m	1	38,70

*Put-Ups: "M" = Shop Spool and "L" = Bulk Spool

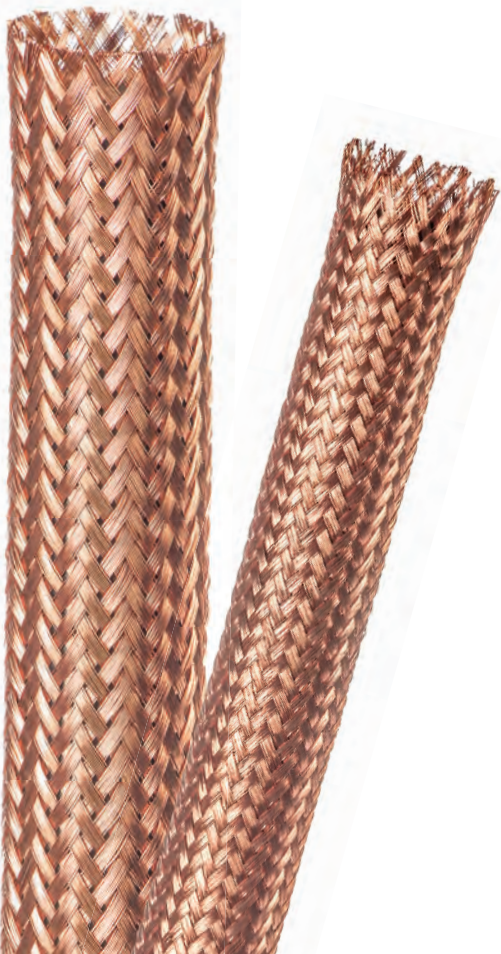

FEATURES

Material	Copper
Grade	MBC
Wall Thickness	0,38mm - 1,52mm
Drawing Number	TF001MBC-WD
Cutting	Shears

COLORS



Copper (CP)

CERTIFICATIONS





ABRASION

Abrasion Resistance	NA
Abrasion Test Machine	Taber 5150
Abrasion Test Wheel	Calibrase H-18
Abrasion Test Load	500g
Room Temperature	°F
Humidity	%
Material Destroyed	NA
Pre-Test Weight	NA
Post-Test Weight	NA
Test End Loss Of Mass Point Of Destruction	NA

PHYSICAL PROPERTIES

Monofilament Diameter (ASTM D-204)	0,13mm
Flammability Rating (SAEJ369)	Non Flammable
Recommended Cutting	Shears
Colors	1
Wall Thickness	0,38mm - 1,52mm
Abrasion	NA
Specific Gravity (ASTM D-792)	NA
Moisture Absorption % (ASTM D-570)	NA
Hard Vacuum Data (ASTM E-595 at 10-5 torr)	NA
TML	NA
CVCM	NA
WVR	NA
Smoke D-Max (ASTM E-662)	NA
Outgassing	NA
Oxygen Index (ASTM D-2863)	NA

FLAMMABILITY

Rating	Non Flammable
--------	---------------

OPERATING TEMPERATURES

Melt Point (ASTM D-2117)	1 981°F / 1 083°C
Maximum Continuous (Mil-I-23053)	°F / °C
Minimum Continuous (Mil-I-23053)	°F / °C

CHEMICAL RESISTANCE

1=No Effect 2=Little Effect 3=Affected 4=More Affected 5=Severely Affected

Aromatic Solvents	1
Aliphatic Solvents	1
Chlorinated Solvents	2
Weak Bases	1
Salts	1
Strong Bases	5
Salt Water (0-S-1926)	1
Hydraulic Fluid (MIL-H-5606)	1
Lube Oil (MIL-L-7808)	1
De-Icing Fluid (MIL-A-8243)	1
Strong Acids	5
Strong Oxidants	5
Esters/Ketones	1
UV Light	2
Petroleum	2
Fungus (ASTM G-21)	2
Halogen Free	Yes
RoHS	Yes
SVHC	NA

